




LED/SMD VIDEOWAND (INDOOR)

LEDMAN 4MM SMD-3-IN-1 HIGH DEFINITION SOLUTION

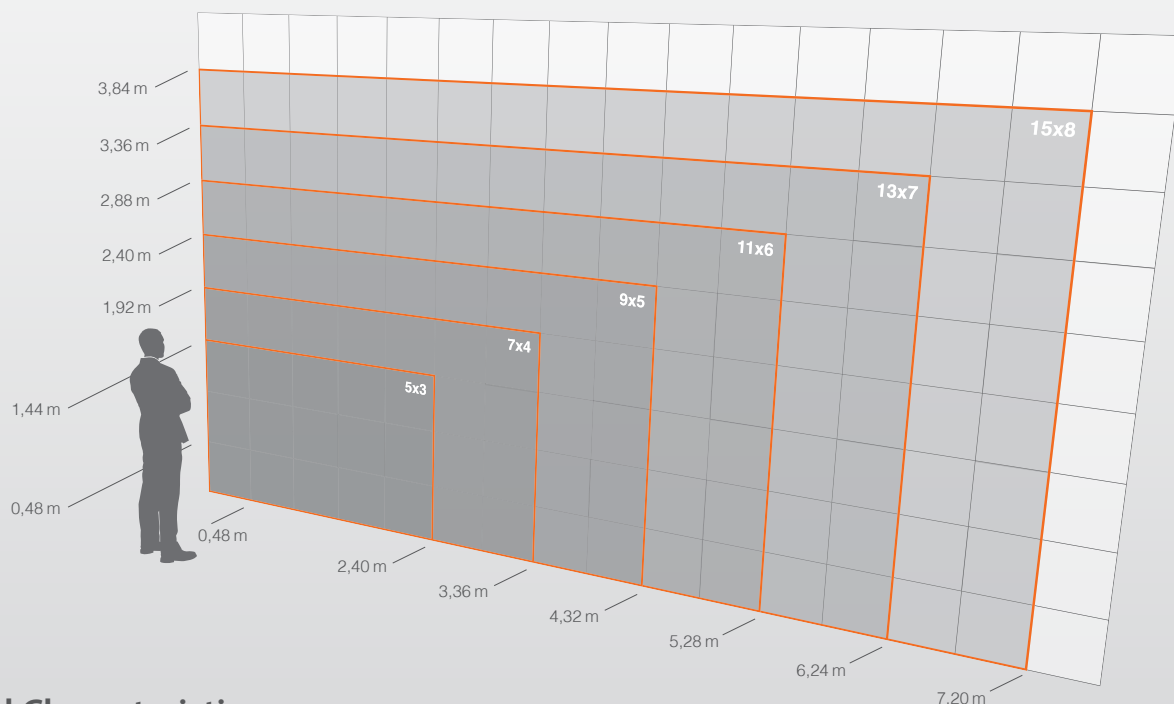

Visual Characteristics

| | |
|--|---------------------------|
| Product Code | U4+ |
| Use | Indoor |
| Description | 4 mm SMD indoor LED panel |
| Virtual Resolution | N |
| LED Type | SMD 3-in-1 (2121) |
| Pixel Pitch | 4 mm |
| Brightness | 2000 Nits |
| Viewing Angle (Horizontal, 50% Brightness) | 150 (± 75) |
| Viewing Angle (Vertical, 50% Brightness) | 150 (± 75) |
| Contrast Ratio (Typical) | 2000:1 |
| Minimum Viewing Distance | 4 m |
| LED's per Pixel | SMD 3-in-1 |
| Pixel per Square Meter | 62500 |
| LED's per Square Meter | 62500 |
| Colours (Panel) | 281 Trillion |
| Processing Depth | 16 bit |
| Video Frame Rate | 50/60 Hz |
| Display Refresh Rate | 2400 Hz |
| Operating Temperature | 0 to 40 C° |
| Lifetime (50% Brightness) | ≥ 100,000 |
| Panel Width | 480 mm |
| Panel Height | 480 mm |
| Panel Depth | 70 mm |
| Panel Diagonal | 679 mm |
| Panel Surface Area | 0,2304 m ² |
| Pixel Matrix (Horizontal) | 120 |
| Pixel Matrix (Vertical) | 120 |
| Ingress Protection (Front / Rear) | IP40 / IP20 |
| Max Power Consumption | 220 W |
| Weight | 8 kg |

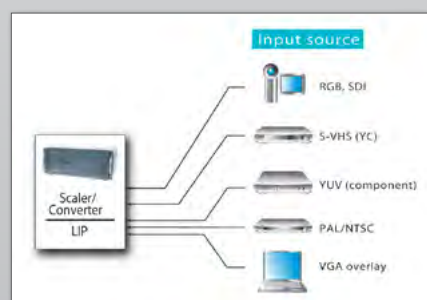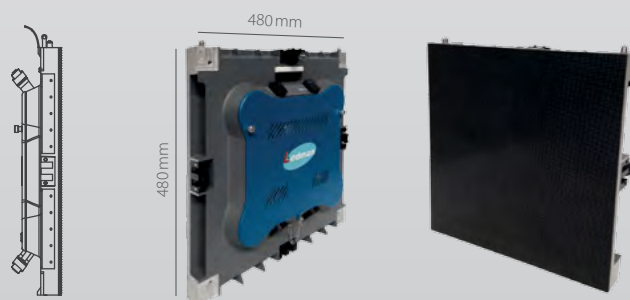

Nachfolgende Angaben stammen vom Hersteller, der Ledman Europe GmbH. Das Managementsystem des Herstellers ist zertifiziert gemäß ISO 14001:2004 und ISO 9001:2008. Das Produkt entspricht den Anforderungen von RoHS. Die Prüfung des Produktes erfolgte durch den TÜV Süd.



HIFI-KLANG Elektronische Medien GmbH & Co. KG
 Am Schäferbrunnen 23 | D-55268 Nieder-Olm
 TEL. +49 6136 7575 | E-MAIL info@hifi-klang.com
 www.hifi-klang.com

**THOMAS REITZ
 MULTIMEDIA**

THOMASREITZMULTIMEDIA
 Marlene-Dietrich-Platz 2 | D-10785 Berlin
 TEL. +49 30 2553 1575 | E-MAIL info@trm-event.de
 www.trm-event.de