

INFiLED LUGH 2,6mm Pixel Pitch



2,6mm Pixel Pitch



Kompakte Bauweise und
stoßfeste LEDs im Randbereich



Hohe Helligkeits-
und Kontrastwerte




-5° /+ 5° Curvbar



Lüfterlose
Konvektionskühlung

INFiLED LUGH 2,6mm Pixel Pitch

Pixel Pitch	2.6mm
Viewing Distance	>2,6m
LEDs	Black Face and Black Body High Brightness SMD, AOB at the edges
Lifespan	100.000 hours
Cabinet Size ^(W*H*D)	500 mm x 500 mm x 76 mm
Cabinet Resolution	192 x 192 dots
Pixel Density	147.456 dots/m ²
Weight	8.8 kg / Cabinet 35.2 kg/m ²
Brightness	1.500 nits
View Angle	horizontal 160° / vertical 160°
Maintenance	Front/Rear-Service
Refresh Rate	3.840 Hz
Color Processing	16 bit
Power Consumption	Max. 580 W/m ² Average 193.3 W/m ²
Operating Temperature	-10°C – +45°C
Installation Mode	Hanging / stacking / fixed
Control System	NovaStar
Curving	concave(-): -1°, -2°, -2,5°, -5° / convex(+): 5°
Max panels	Hanging 18 panels / Stacking 14 panels
IP Rating	IP30
Certifications	CE, RoHS, EMC Class A (EMV Klasse A), ETL, FCC, LVD

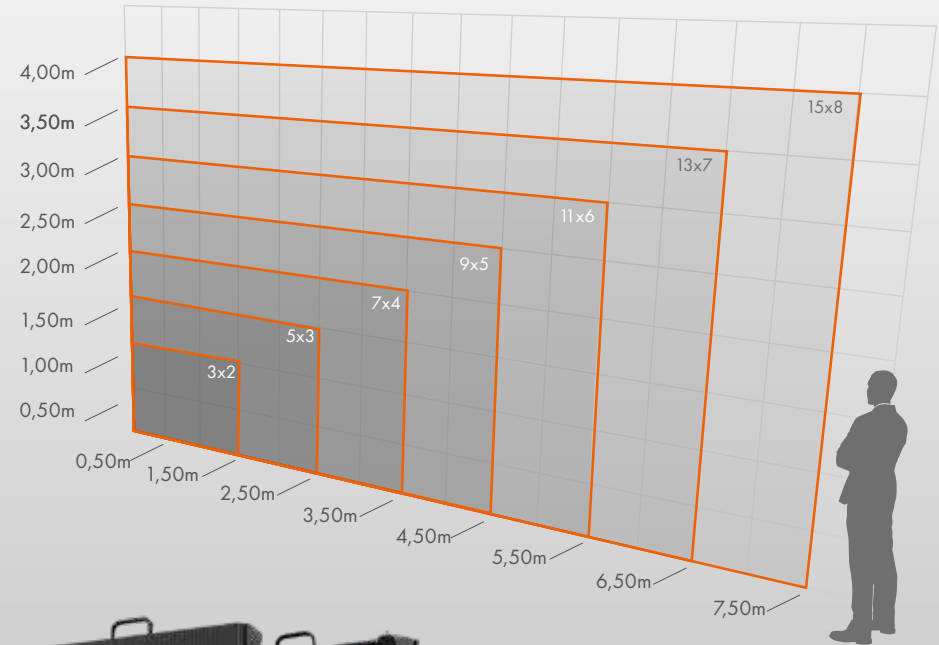

hifi-klang
LED display & video + audio solutions

Hifi Klang Elektronische Medien GmbH & Co. KG
Am Schäferbrunnen 23 | 55268 Nieder-Olm
Tel.: +49 6136 7575 | E-Mail: kontakt@hifi-klang.com

www.hifi-klang.com